

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**This Page Blank (uspto)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>B01D 47/00, A61L 9/12, B05B 5/025</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/28883</b> <b>(43) International Publication Date:</b> 7/2/97 14 August 1997 (14.08.97)
<b>(21) International Application Number:</b> PCT/GB97/00353 <b>(22) International Filing Date:</b> 6 February 1997 (06.02.97)  <b>(30) Priority Data:</b> 9602434.4                      7 February 1996 (07.02.96)                      GB 9622991.9                      5 November 1996 (05.11.96)                      GB  <b>(71) Applicants (for all designated States except US):</b> UNIVERSITY OF SOUTHAMPTON [GB/GB]; Highfield, Southampton SO17 1BJ (GB). RECKITT & COLMAN PRODUCTS LIMITED [GB/GB]; One Burlington Lane, London W4 2RW (GB).  <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> FOX, Rodney, Thomas [GB/GB]; 30 South Street, Cottingham, Hull HU16 4AS (GB). HUGHES, John, Farrell [GB/GB]; 2 Shepherd's Close, Bartley, Southampton SO40 2JL (GB). HARRISON, Neale, Mark [GB/GB]; Tutbury, Burton-on-Trent, Staffs DE13 9HZ (GB). WHITMORE, Lindsey, Faye [GB/GB]; 49 Chase Farm Close, Waltham Chase, Southampton SO32 2UB (GB).  <b>(74) Agent:</b> BOULT WADE TENNANT; 27 Fumival Street, London EC4A 1PQ (GB).	<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>  <i>inventor</i> <i>Jerrin missing</i>	
<b>(54) Title:</b> METHOD OF PRECIPITATING AIRBORNE PARTICLES  <b>(57) Abstract</b> <p>A method of precipitating airborne particles from air comprising contacting the airborne particles with liquid droplets from a domestic aerosol spray device, a unipolar charge being imparted to the liquid droplets during the spraying of the liquid droplets by the aerosol spray device, the unipolar charge providing the droplets with a charge to mass ratio of at least <math>\pm 1 \times 10^{-4}</math> C/Kg, and the unipolar charge being transferred between the liquid droplets and the airborne particles by contact which causes the airborne particles to precipitate due to mutual repulsion.</p> <p style="text-align: right;">. BBA.</p> 102(a)		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

### METHOD OF PRECIPITATING AIRBORNE PARTICLES

The present invention relates to a method of precipitating airborne particles and, in particular, to a method which is suitable for domestic use.

Airborne particles such as dust aero allergens are believed to have a significant effect on individuals susceptible to allergies such as asthma. These particles reduce the air quality and can set off breathing difficulties when disturbed, for example after vacuum cleaning.

We have now developed a method of reducing the problems caused by airborne particles by causing the particles to precipitate.

Accordingly, the present invention provides a method of precipitating airborne particles from air in a domestic environment containing such particles, which method comprises contacting the airborne particles in the domestic environment with liquid droplets from a domestic aerosol spray device, a unipolar charge being imparted to the said liquid droplets during the spraying of the liquid droplets by the aerosol spray device, the unipolar charge being at a level such that the said droplets have a charge to mass ratio of at least  $\pm 1 \times 10^{-6}$  C/Kg, and the unipolar charge being transferred between the liquid droplets and the airborne particles by contact which causes the airborne particles to precipitate due to mutual repulsion.

Preferably the liquid droplets have a charge to mass ratio of from  $\pm 1 \times 10^{-6}$  C/Kg to  $\pm 1 \times 10^{-3}$  C/Kg. The higher the charge to mass ratio of the liquid droplets, the more pronounced the precipitation of the airborne particles.

The liquid which is sprayed from the aerosol

- 2 -

spray device is preferably a liquid which is in the form of a water and hydrocarbon mixture, or an emulsion, or which is converted into an emulsion by shaking the aerosol device before use, or during the spraying process. Examples of domestic aerosol compositions which are in a form suitable for spraying in accordance with the method of the invention are Dettol Anti-Bacterial Room Spray and Air Wick Neutrair manufactured by Reckitt and Colman Products Ltd.

Whilst all liquid aerosols are known to carry a net negative or positive charge as a result of double layer charging, or the fragmentation of liquid droplets, the charge imparted to droplets of liquids sprayed from standard devices is only of the order of  $1 \times 10^{-8}$  to  $1 \times 10^{-5}$  C/Kg.

The invention relies on combining various characteristics of the aerosol system in order to maximise the charging of the liquid as it is sprayed from the aerosol spray device. The optimum combination varies for each product formulation.

It is possible to impart higher charges to the liquid droplets by choosing the material, shape and dimensions of the actuator, insert valve and dip tube and the characteristics of the liquid which is to be sprayed, so that the required level of charge is generated as the liquid is dispersed as droplets.

A number of characteristics of the aerosol system increase double layer charging and charge exchange between the liquid formulation and the surfaces of the aerosol system. Such increases are brought about by factors which may increase the turbulence of the flow through the system, and increase the frequency and velocity of contact between the liquid and the internal surfaces of the container and valve and actuator system.

- 3 -

Characteristics of the actuator can be optimised to increase the charge levels on the liquid sprayed from the container. A smaller orifice in the actuator insert, of a size of 0.45mm or less, increases the charge levels of the liquid sprayed through the actuator. The choice of material for the actuator can also increase the charge levels on the liquid sprayed from the device with materials such as nylon, PVC, and polypropylene tending to increase the charge levels. The geometry of the orifice in the insert can be optimised to increase the charge levels on the liquid as it is sprayed through the actuator. Inserts which promote the mechanical break-up of the liquid give better charging.

The actuator insert of the spray device may be formed from a conducting, insulating, semiconducting or static-dissipative material.

The characteristics of the dip tube can be optimised to increase charge levels in the liquid sprayed from the container. A narrow dip tube, of for example about 1.27mm internal diameter, increases the charge levels on the liquid, and the dip tube material can also be changed to increase charge.

Valve characteristics can be selected which increase the charge to mass ratio of the liquid product as it is sprayed from the container. A smaller tailpiece orifice in the housing, of about 0.65mm, increases product charge to mass ratio during spraying. A reduced number of holes in the stem, for example 2 x 0.50mm also increases product charge during spraying. The presence of a vapour phase tap helps to maximise the charge levels, a smaller orifice vapour phase tap, of for example about 0.50mm to 0.75mm generally giving higher charge levels.

Changes in the product formulation can also

- 4 -

affect charging levels. A formulation containing a mixture of hydrocarbon and water, or an emulsion of an immiscible hydrocarbon and water, will carry a higher charge to mass ratio when sprayed from the aerosol device than either a water alone or hydrocarbon alone formulation.

Accordingly, in another aspect the present invention provides a method for imparting a unipolar charge to liquid droplets of a product which are sprayed from a domestic aerosol spray device at a level such that the said droplets have a charge to mass ratio of at least  $\pm 1 \times 10^{-4}$  C/Kg, the said method comprising choosing the material of the actuator, the size of orifice of the actuator, the diameter of the dip tube, the characteristics of the valve and the formulation of the product in order to achieve the required charge to mass ratio.

The liquid droplets sprayed from the aerosol- spray device will generally have a range of droplets sizes in the range of from 5 to 100 micrometres, with a peak of droplets of about 40 micrometres.

The liquid which is sprayed from the aerosol spray device may contain a predetermined amount of a particulate material, for example fused silica, or a predetermined amount of a volatile solid material, such as menthol or naphthalene.

The method of the present invention accelerates the natural process of precipitation of airborne particles by indirect charging of the particles, thereby enabling the air quality to be improved quickly and conveniently.

The present invention enables domestic aerosol products to be used to reduce the amount of airborne dust particles in a room with effect in a short space of time. The aerosol product reduces the



- 5 -

concentration of airborne particles in a room, making breathing easier, especially for allergy sufferers. The product would be of particular benefit directly following vacuum cleaning when the concentration of  
5 aero-allergens is elevated.

The present invention will be further described with reference to the following Example.

#### EXAMPLE 1

10

A cloud of airborne talc particles was generated in an airtight enclosure using a powder spray gun, and the natural precipitation rate was recorded on a series of clean microscopic slides, presented for 30  
15 seconds each, at 30 second intervals. The amount of talc on each slide was quantified by counting the number of particles in the field of view of a microscope, x140 magnification, in 10 randomly chosen locations. The mean number of particles for each 30  
20 second interval was then calculated, and the values normalized to one to account for any variation in the cloud densities between experiments. The number of particles for the first 30 seconds after cloud generation was taken as one, and all the other values  
25 normalized to this point. The natural settling rate of talc was taken as the control.

To assess the effect of a domestic aerosol product, Airwick Neutair (Reckitt & Colman Products Ltd) on the rate of precipitation of talc, the aerosol  
30 was sprayed into the cloud for 5 seconds, 75 seconds after generation of the cloud using three different nozzle configurations. The precipitation rate of the talc under these conditions was recorded in the same way as previously described. The natural settling  
35 rate of talc was measured as a control 1, and the

- 6 -

procedure described was then carried out for the aerosol with a standard acetal nozzle 2 having an insert with a tapered hole, with a nozzle containing a brass insert 3 with a straight-through hole, and with a -10 kilo volts (KV) charge applied to the seam of the can from a high voltage power supply 4. Each experiment was repeated 3 times.

Table 1 below shows the mean number of talc particles seen in the field of view for each of the different conditions described above. The data has been normalized. This data is represented graphically in Figure 1.

**TABLE 1**

Time, seconds	Control, natural settling (1)	Aerosol, acetal nozzle (2)	Aerosol, brass nozzle (3)	Aerosol, brass nozzle, -10KV (4)
30	1	1	1	1
60	0.69	0.66	0.73	1.06
90	0.54	0.54	0.71	1.01
120	0.42	0.39	0.59	0.77
150	0.47	0.33	0.57	0.58
180	0.53	0.50	0.74	0.58
210	0.54	0.33	0.44	0.52
240	0.51	0.35	0.42	0.46
270	0.49	0.41	0.40	0.39

This data shows that the aerosol with the standard acetal nozzle 2 does not increase talc precipitation above the normal rate of settling 1. With the brass nozzle 3 there is a small increase in precipitation, and with the application of a high voltage to the brass nozzle 4 the charge to mass ratio

- 7 -

of the aerosol droplets is significantly enhanced as shown in Table 2, below:

**TABLE 2**

Material	Charge to Mass Ratio
Aerosol, standard nozzle	$+2.4 \times 10^{-6}$ C/Kg
Aerosol, brass nozzle	$-2.7 \times 10^{-7}$ C/Kg
Aerosol, brass nozzle, -10KV	$-9.1 \times 10^{-4}$ C/Kg
Talcum Powder	$+7.8 \times 10^{-6}$ C/Kg

**EXAMPLE 2**

A dust cloud was generated in an air tight enclosure of approximately 66m<sup>3</sup> using 0.5 grams of house dust sieved to below 63 micrometres. The cloud was generated by blowing the dust for 1 second with clean, dry compressed air. The original density of the cloud 30 seconds after its generation was measured using a Malvern APC (air particle counter) 300A. The number of particles in 0.028m<sup>3</sup> of air was recorded into 8 size bands between 1 and 25 micrometres by the particle counter. Measurements were subsequently taken 2.0, 5.5, 11.5 and 21.5 minutes after the cloud was generated. The number of particles counted into each size band at each time point was converted into the percentage of particles remaining, of those present 30 seconds after generation of the cloud. This procedure was repeated 3 times and the mean percentage for each size band at each time point calculated. This represented the natural rate of clearing the dust cloud, and was used to compare particle clearing after the various treatments.

To show the clearance rate of airborne parcels

- 8 -

following treatment with the standard Dettol Anti-Bacterial Room Spray product (Reckitt & Colman Products Ltd), a dust cloud was generated as before. A particle count was made 30 seconds after cloud generation, and considered to be the original cloud density. 1.5 minutes after cloud generation a 0.5 second spray of the standard Dettol product was made into the dust cloud. Further particle counts were made 0.5, 4, 10 and 20 minutes after the spray of Dettol. These counts were therefore 2.0, 5.5, 11.5 and 21.5 minutes after cloud generation, and can be compared to the particle counts during natural clearing. Again, this procedure was repeated 3 times, the data corrected for liquid droplets (as described below), and converted into the percentage of particles remaining from the original cloud.

The Malvern APC 300 particle counter measures not only solid airborne particles but also airborne liquid droplets. For this reason the particle counts taken after a spray of liquid aerosol must be corrected for the number of liquid droplets originating from this source. To do this a background particle count was first taken. The aerosol was then sprayed into the enclosure for 0.5 seconds, and particle counts taken after 0.5, 4, 10 and 20 minutes. The background particle count for each size band was subtracted from the droplet count to leave the count for liquid droplets alone. Three replicates were performed. The mean number of liquid droplets in each size band, at 0.5, 4, 10 and 20 minutes after spraying the aerosol was then subtracted from the particle counts taken at these times after treatment of the dust cloud with the liquid aerosol. This leaves only the number of solid particles which remain airborne. After conversion to percentage of solid particles remaining from the

- 9 -

original cloud, these values can be compared to the percentage of particles remaining over time during natural clearing.

The effect of three aerosol treatments were measured in this way. The standard Dettox aerosol, Dettox with an Acc-u-sol® (manufactured by Precision Valve UK Ltd) actuator with a 0.45mm MBU CO<sub>2</sub> insert, and standard Dettox with -10 KV applied to the seam of the can from a high voltage power supply. The effect of the treatments on particles of between 2 and 5 micrometres is shown in Figure 2. The trend for a reduction in the number of particles remaining airborne which are of 1 to 2 micrometres and 5 to 25 micrometres is very similar to that shown for particles of 2 to 5 micrometres. Figure 2 shows that 30 seconds after spraying, for all treatments, with the exception of standard Dettox, the reduced particle concentration is maintained below the natural concentration level for more than 20 minutes. The standard Dettox product has a charge to mass ratio of  $3 \times 10^{-5}$  C/Kg. Treatment of a dust cloud with this product reduced the number of particles of this size remaining airborne by no more than 30%. The "Acc-u-sol" 0.45mm MBU CO actuator increases the charge to mass ratio to  $6.5 \times 10^{-5}$  C/Kg, and accordingly effects a slightly higher reduction in the number of airborne particles remaining. Applying -10 KV to the Dettox aerosol artificially increases the charge to mass ratio to  $-6.5 \times 10^{-4}$  C/Kg. Figure 2 clearly shows that Dettox with this level of charge reduced the percentage of 2 to 5 micron particles remaining airborne by about 60%. This evidence demonstrates that domestic room sprays with elevated charge to mass ratios can significantly reduce the number of airborne particles in a broad spectrum of sizes.

- 10 -

The charge to mass ratio of domestic room sprays can be increased to the required level of  $1 \times 10^{-4}$  C/Kg by the methods described herein. The product Air Wick Neutrain attains a charge to mass ratio of  $-2 \times 10^{-4}$  C/Kg when sprayed through an "Acc-u-sol" actuator with 0.45mm MBU CO<sub>2</sub> insert, and a valve system with 3mm (internal diameter) polyethylene dip tube, 0.65mm diameter housing orifice, 4 x 0.61mm diameter stem orifices and a 1.17mm diameter vapour phase tap.

10

- 11 -

**CLAIMS:**

1. A method of precipitating airborne particles from air in a domestic environment containing such  
5 particles, which method comprises contacting the airborne particles in the domestic environment with liquid droplets from a domestic aerosol spray device, a unipolar charge being imparted to the said liquid droplets during the spraying of the liquid droplets by  
10 the aerosol spray device, the unipolar charge being at a level such that the said droplets have a charge to mass ratio of at least  $\pm 1 \times 10^{-4}$  C/Kg, and the unipolar charge being transferred between the liquid droplets and the airborne particles by contact which  
15 causes the airborne particles to precipitate due to mutual repulsion.

2. A method as claimed in claim 1, wherein the droplets have a charge to mass ratio of from  $\pm 1 \times 10^{-4}$  C/Kg to  $\pm 1 \times 10^{-3}$  C/Kg.  
20

3. A method as claimed in claim 1 or claim 2 wherein the liquid droplets contain a particulate material.

25 4. A method as claimed in any one of the preceding claims wherein the liquid sprayed from the aerosol device is an emulsion.

30 5. A method as claimed in any one of the preceding claims wherein the liquid droplets have a size in the range of from 5 to 100 micrometres.

35 6. A method as claimed in any one of the preceding claims wherein the domestic aerosol spray device comprises an aerosol can.


- 12 -

7. A method for imparting a unipolar charge to liquid droplets of a product which are sprayed from a domestic aerosol spray device at a level such that the said droplets have a charge to mass ratio of at least  
5 +/-  $1 \times 10^{-4}$  C/Kg, the said method comprising choosing the material of the actuator, the size of orifice of the actuator, the diameter of the dip tube, the characteristics of the valve and the formulation of the product in order to achieve the required charge to  
10 mass ratio.




1/2

FIG. 1.

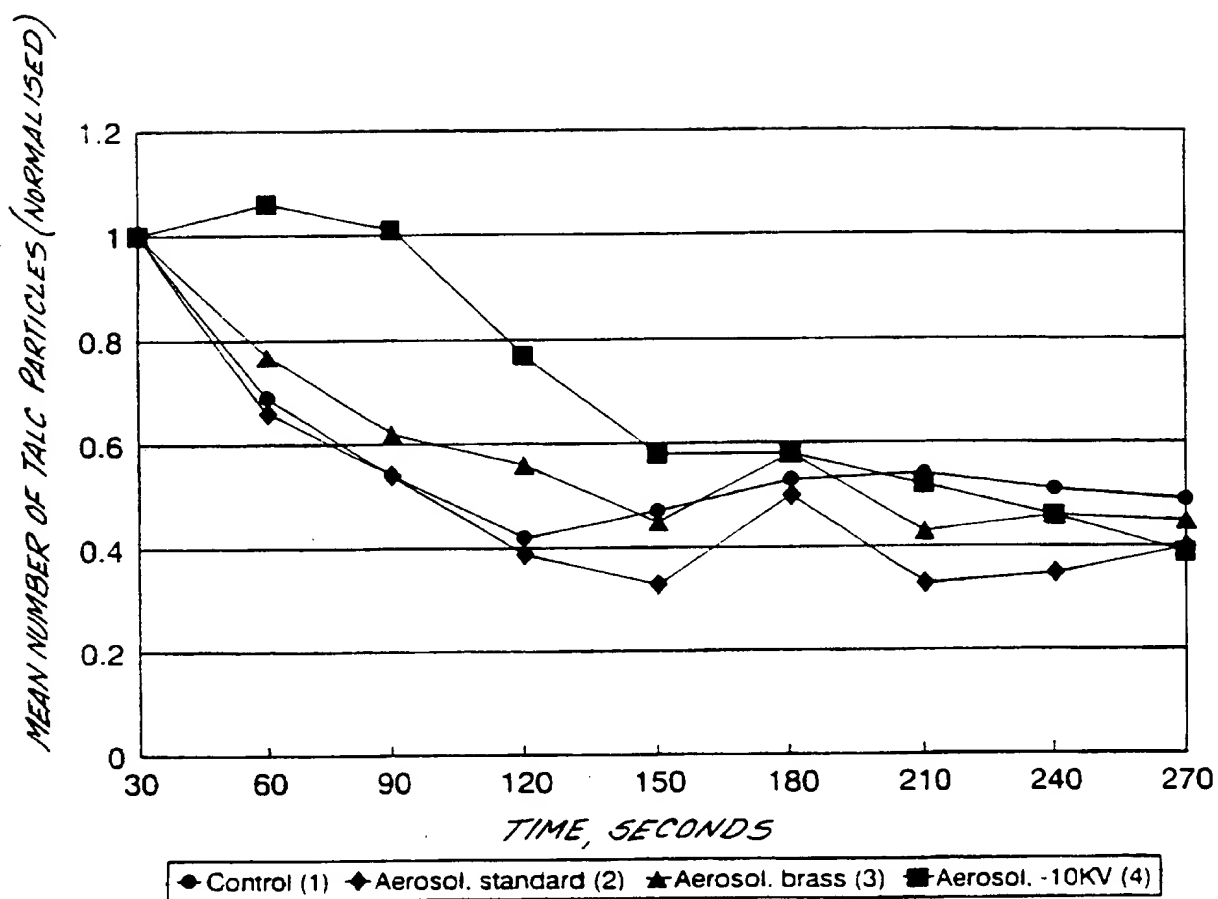

2/2

FIG. 2. ENHANCED SETTLING OF 2 MICRON PARTICLES BY LIQUID AEROSOL DROPLETS

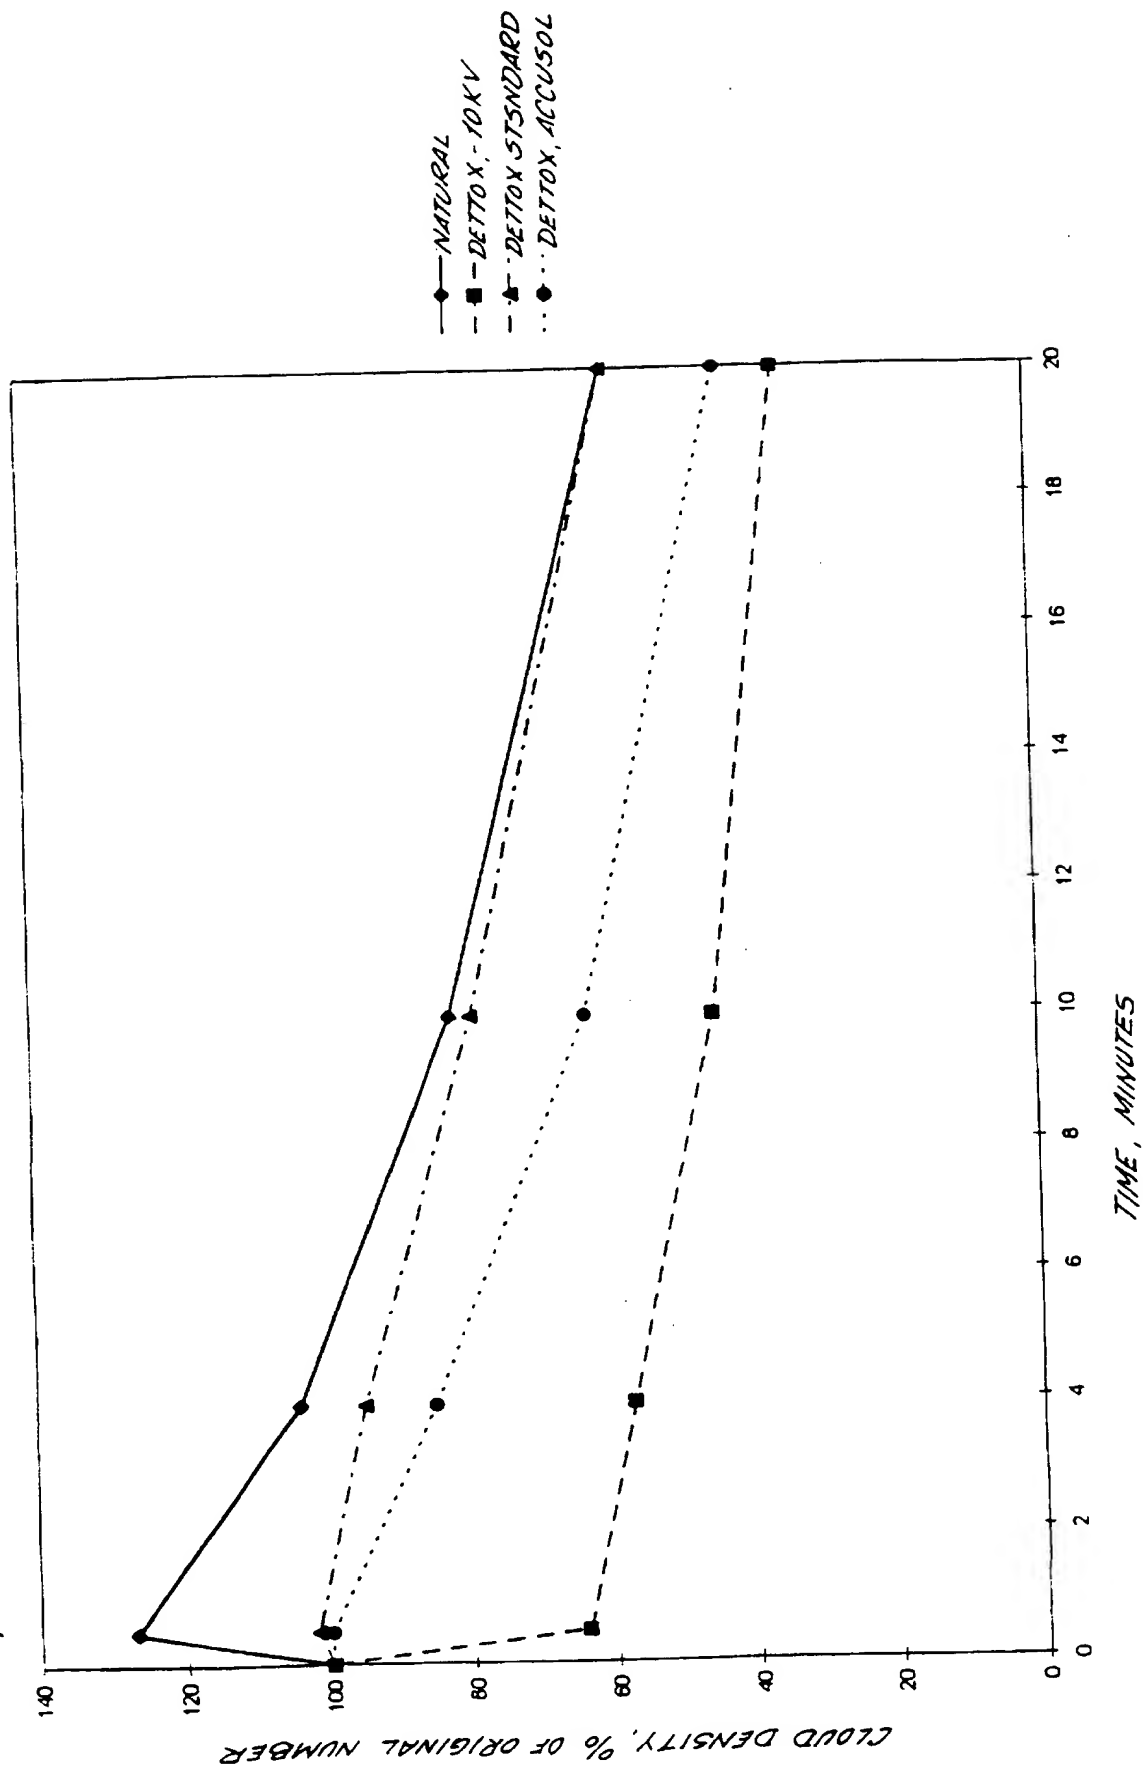

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 97/00353

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 B01D47/00 A61L9/12 B05B5/025

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B01D A61L B05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 776 515 A (MICHALCHIK MICHAEL) 11 October 1988 see column 2, line 51 - line 52 see column 3, line 46 - column 4, line 26 see column 6, line 35 - line 52 ---	1,2,7
X	DATABASE WPI Section EI, Week 8946 Derwent Publications Ltd., London, GB; Class X25, AN 89-338598 XP002028580 & SU 1 482 732 A (ALMA POWER INST) , 30 May 1989 see abstract --- -/-	7

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

2 April 1997

Date of mailing of the international search report

22. 04. 97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 PatentAan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Polesak, H

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 97/00353

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 541 844 A (MALCOLM DAVID H) 17 September 1985 see column 2, line 34 - line 56 see column 3, line 10 - line 15 ---	1,2,5,7
A	US 4 971 257 A (BIRGE MARC) 20 November 1990 ---	4
A	WO 82 01481 A (HANSEN RONALD P) 13 May 1982 -----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 97/00353

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4776515 A	11-10-88	NONE	
US 4541844 A	17-09-85	US 4619670 A	28-10-86
US 4971257 A	20-11-90	NONE	
WO 8201481 A	13-05-82	EP 0063575 A	03-11-82

**This Page Blank (uspto)**